



EQUIP TO WIN® | UCSSPIRIT.com | 800.526.4856

ATHLETIC FACILITIES

THROWING RINGS

- DISCUS
- CONCENTRIC CIRCLE
- SHOT PUT / HAMMER
- INDOOR THROWS PLATFORM
- SHOT PUT TOE BOARDS

RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

DESCRIPTION OF COMPONENTS:




- Four-piece construction throwing ring
- Diameter is 8.2' (2.5 m.)
- 10' x 10' x 3 1/8" Form maintains ring shape and supports concrete for entire platform
- (4) Built-in drain holes
- (1) Drain supplied
- High-impact corrosion-resistant powder coating

RING:


- 2" x 2" x 1/4" Pre-bent aluminum welded to form base

FORM BASE:

- Aluminum C-channel
- 2" x 4" x 1/4" Diagonal cross-support with flat plate welded in corners
- Provides masonry fastening hold to keep in place while pouring concrete

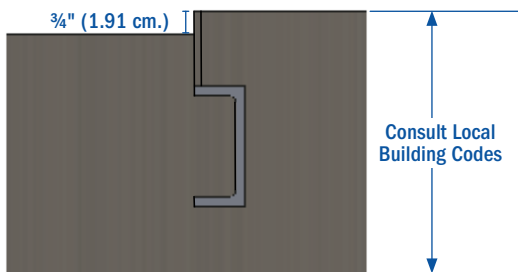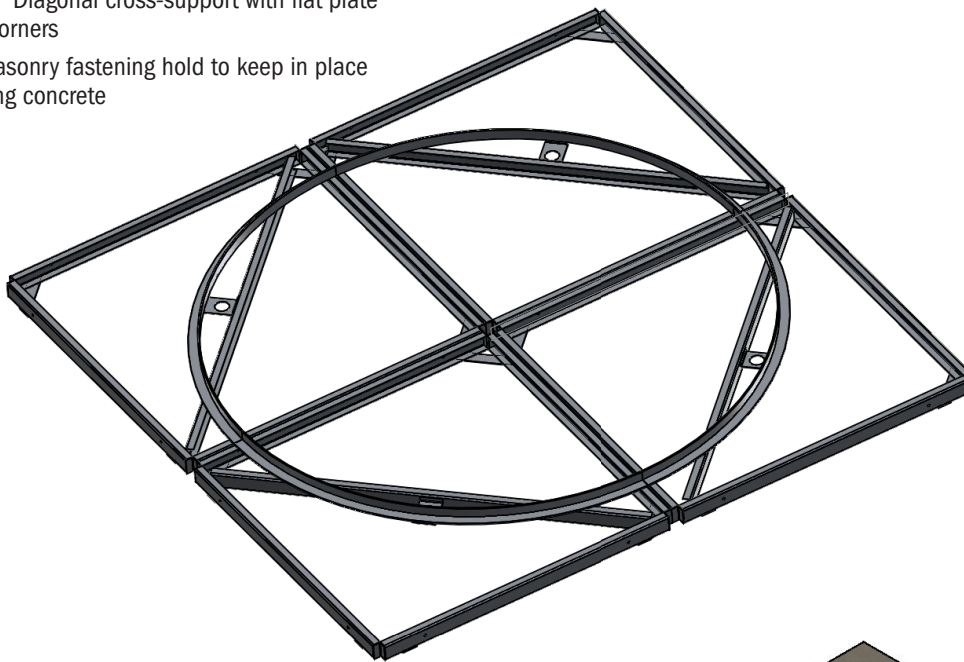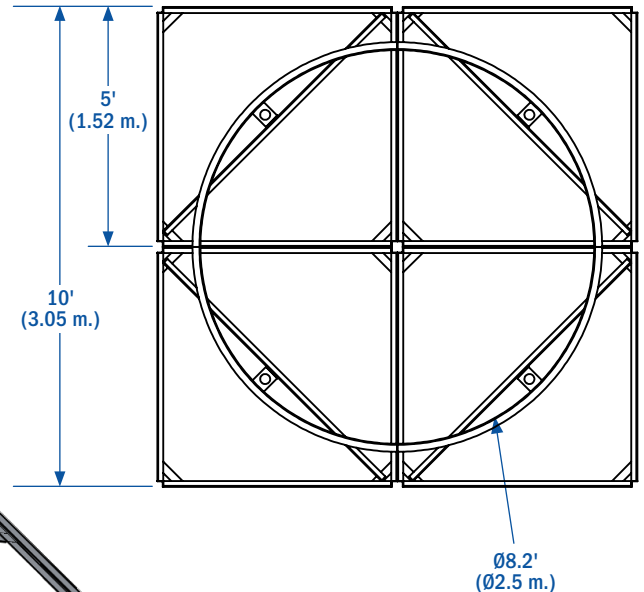


CROSS SECTION

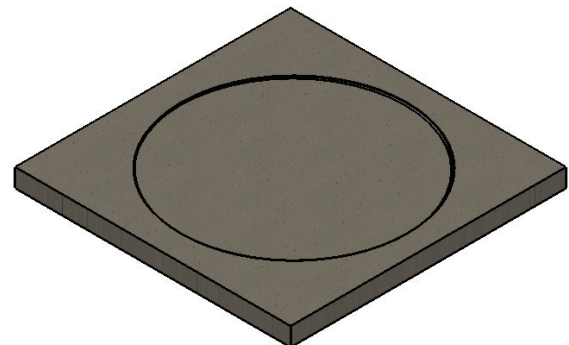


INSTALLED PRODUCT

RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

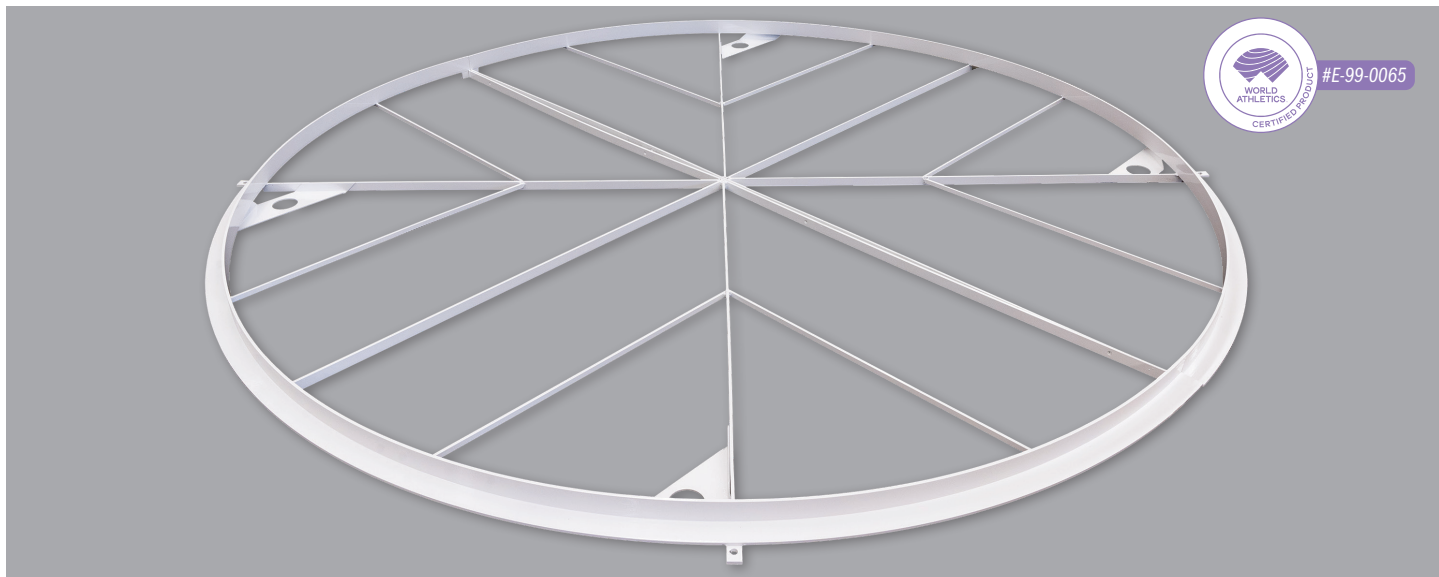

DESCRIPTION OF COMPONENTS:



- (2) piece construction throwing ring
- Web reinforcement maintains precise ring size and supports concrete
- Diameter is 98.43" (2.5 m.)
- 2½" x ¼" aluminum perimeter
- ¾" x ¾" x ¼" aluminum supports
- High-impact and corrosion-resistant white powder coating

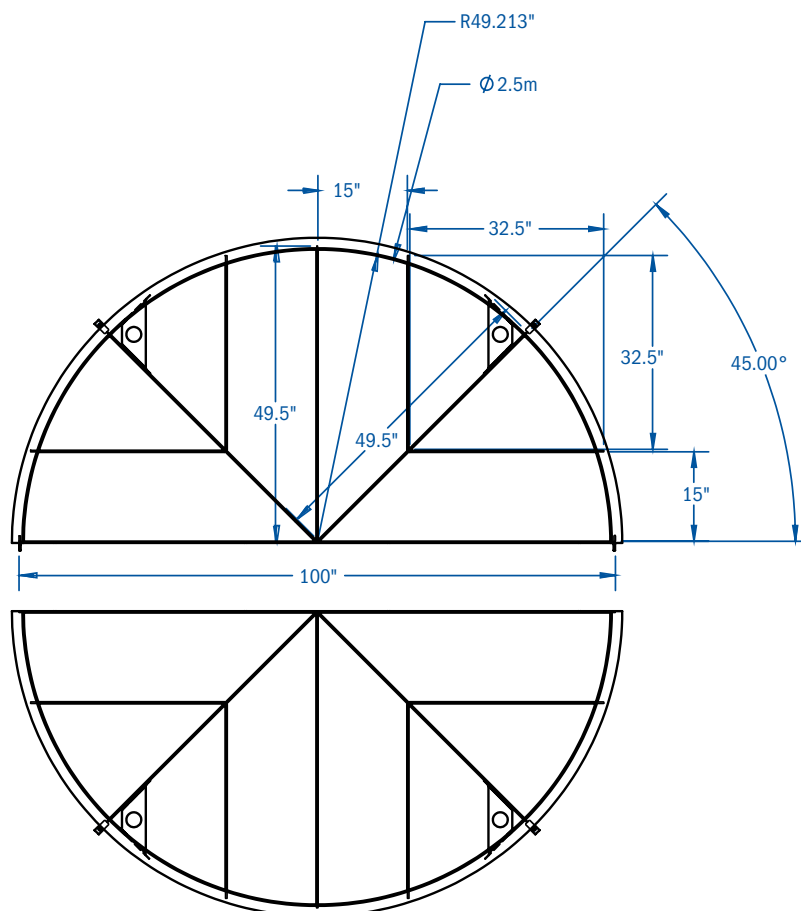


RULE AND STANDARD COMPLIANCE WORLD ATHLETICS, USATF, NCAA, NFHS

DESCRIPTION OF COMPONENTS:

- Two-piece, pre-bent construction
- Diameter is 8.2' (2.5 m.)
- 2" x 2" x 1/4" Corrosion-resistant aluminum perimeter
- Mill finish

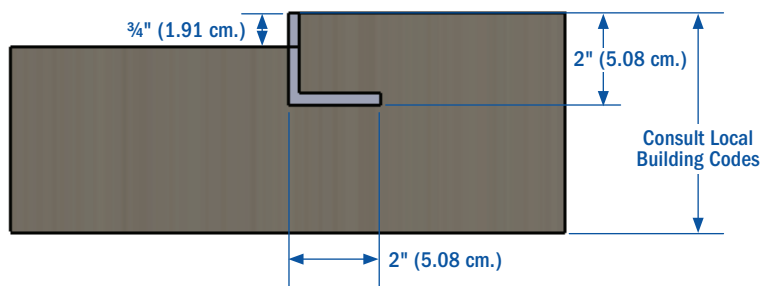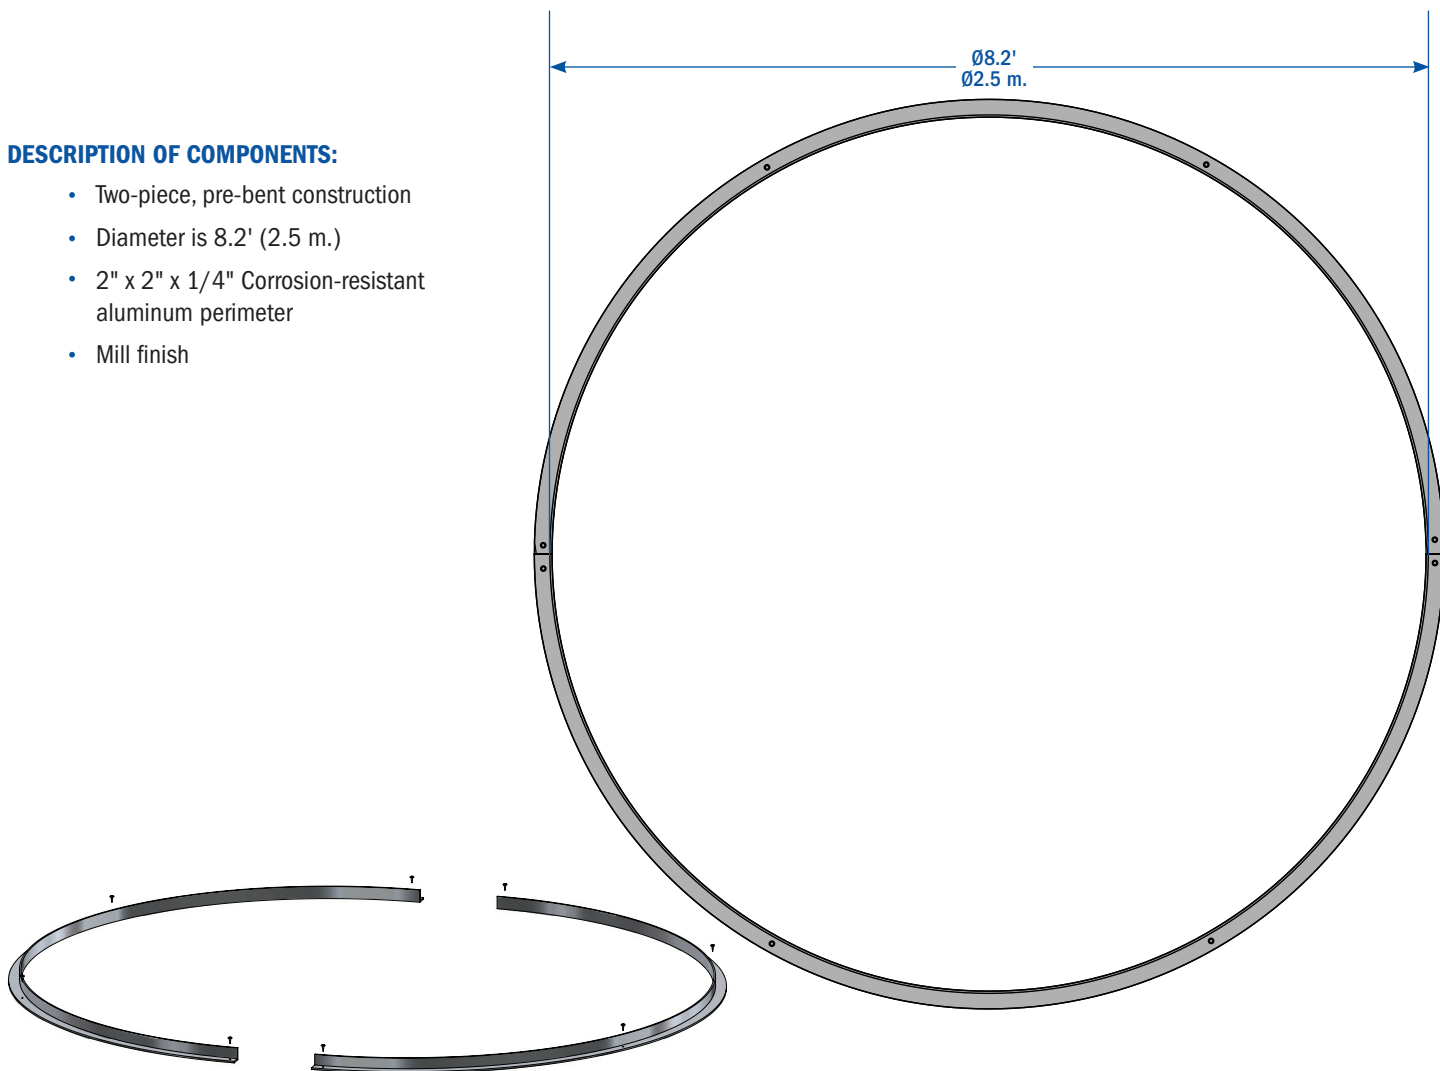

CROSS SECTION

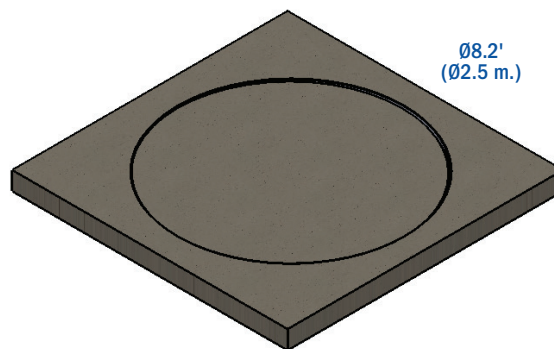

INSTALLED PRODUCT

RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

DESCRIPTION OF COMPONENTS:



- Four-piece construction throwing ring
- Diameter is 7' (2.135 m.)
- 10' x 10' x 3 1/8" Form maintains ring shape and supports concrete for entire platform
- (4) Built-in drain holes
- High-impact corrosion-resistant powder coating

RING:


- 2" x 2" x 1/4" Pre-bent aluminum welded to form base

FORM BASE:

- Aluminum C-channel
- 2" x 4" x 1/4" Diagonal cross-support with flat plate welded in corners
- Provides masonry fastening hold to keep in place while pouring concrete

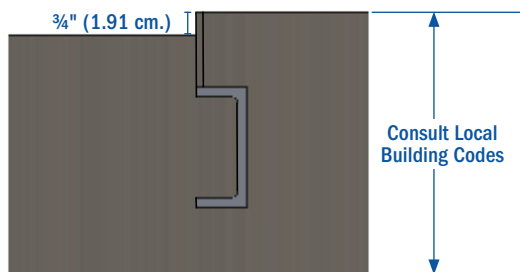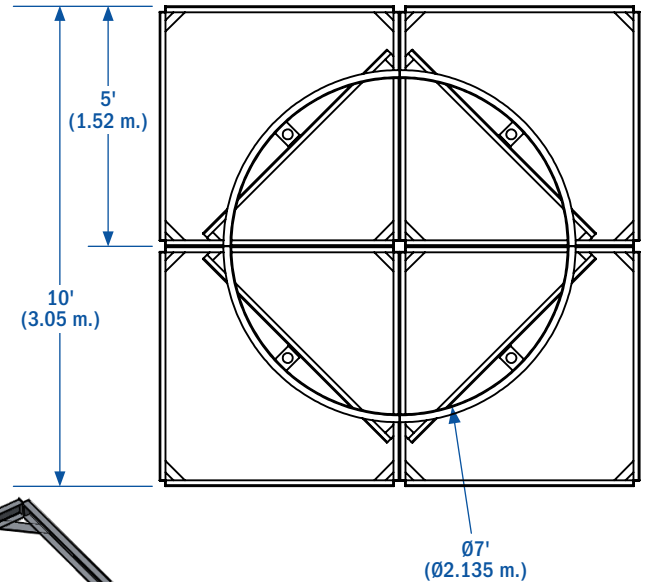


CROSS SECTION

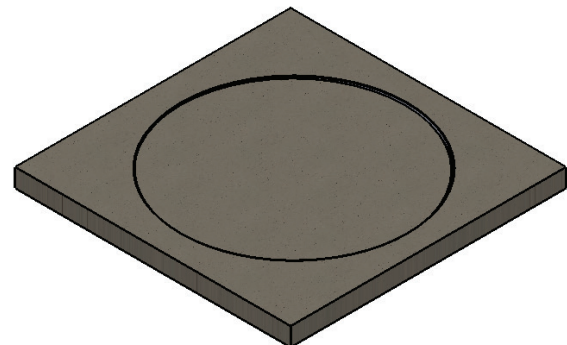

INSTALLED PRODUCT

RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

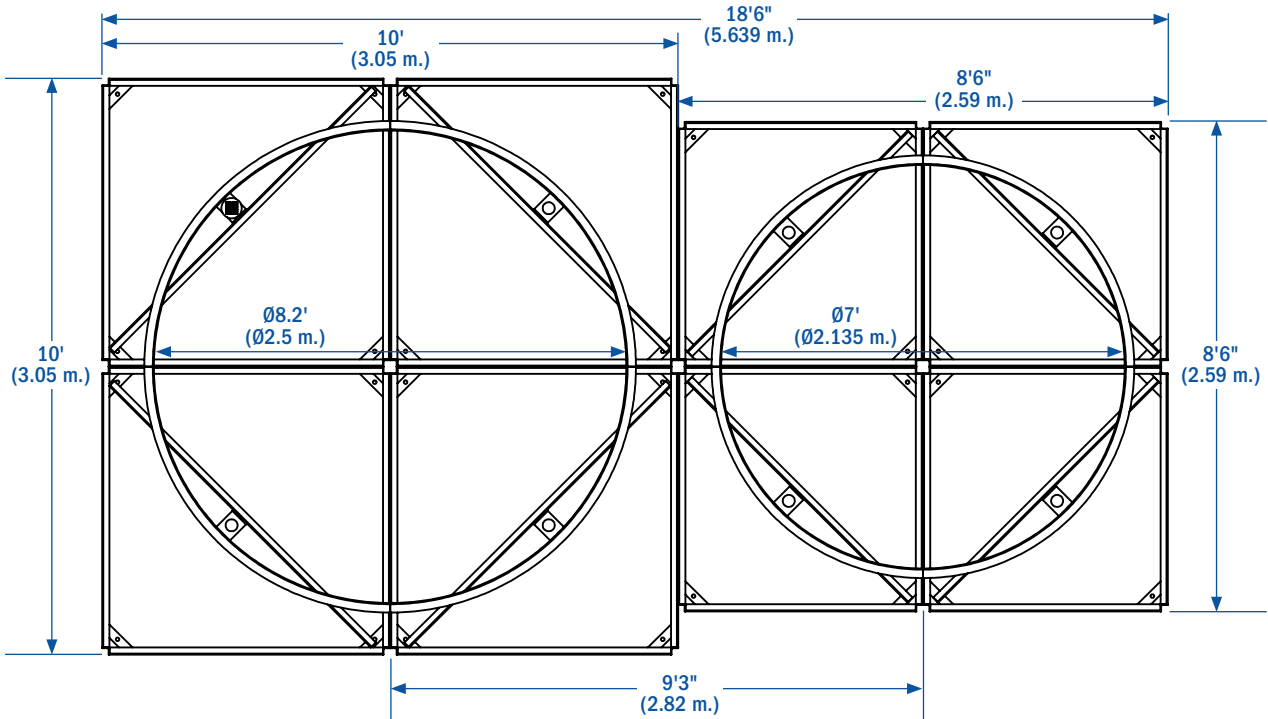

DESCRIPTION OF COMPONENTS:


- (2) Four-piece construction throwing rings
- Larger Form Diameter is 8.2' (2.5 m.)
- Smaller Form Diameter is 7' (2.135 m.)
- 10' x 10' x 4" & 8½' x 8½' x 3" Forms maintain ring shape and supports concrete for entire platform
- (4) Built-in drain holes per ring (8 total)
- (1) Drain supplied per ring (2 total)
- High-impact corrosion-resistant powder coating

RINGS:


- 2" x 2" x ¼" Pre-bent aluminum welded to form base

DUAL RING FORM BASE:

- Aluminum C-channel
- 2" x 4" x ¼" Diagonal cross-support with flat plate welded in corners
- Provides masonry fastening hold to keep in place while pouring concrete

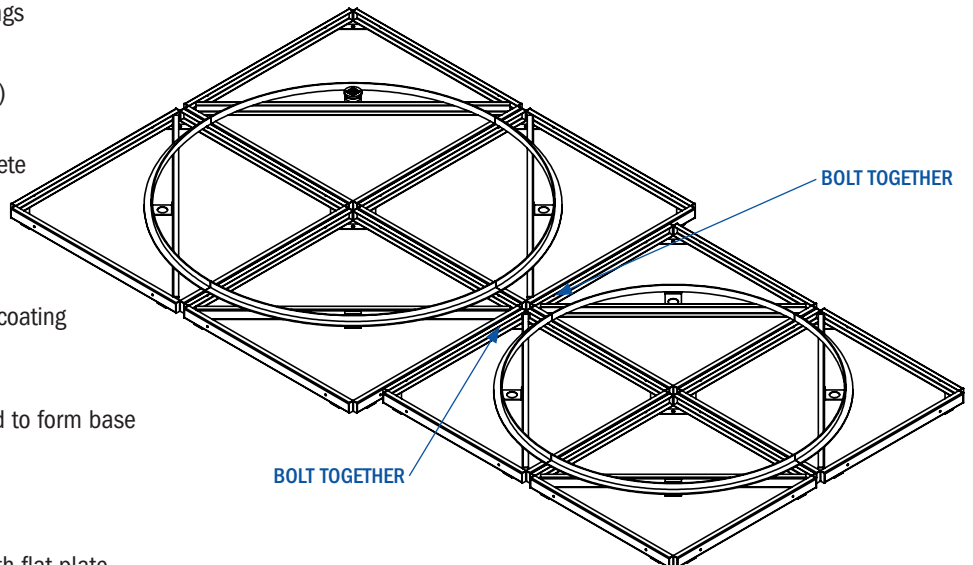


RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

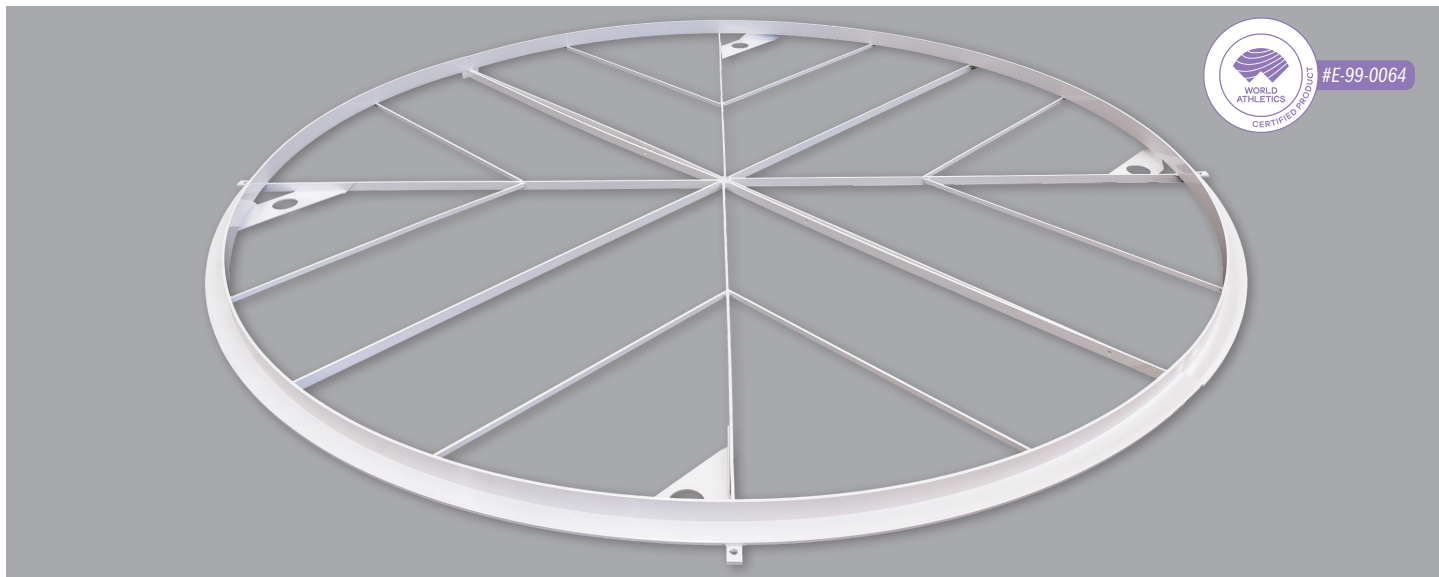

DESCRIPTION OF COMPONENTS:


- (2) piece construction throwing ring
- Web reinforcement maintains precise ring size and supports concrete
- Diameter is 84.06" (2.135 m.)
- 2½" x ¼" aluminum perimeter
- ¾" x ¾" x ¼" aluminum supports
- High-impact and corrosion-resistant white powder coating

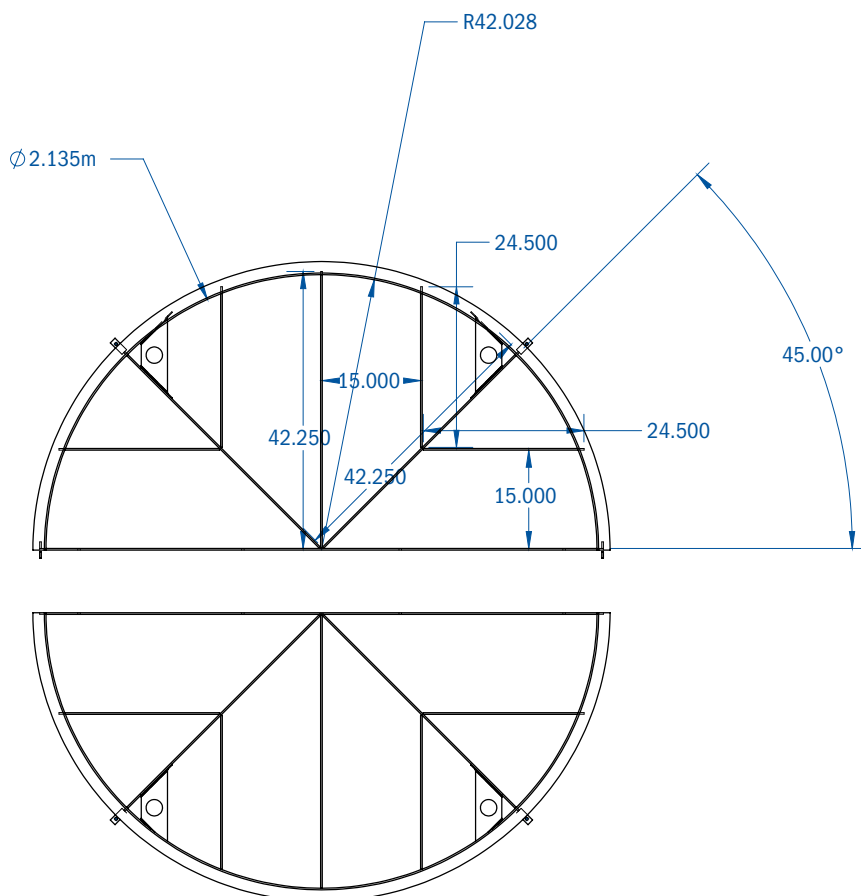


RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

DESCRIPTION OF COMPONENTS:


- (12) Cast aluminum segments (A) quickly convert pre-existing discus ring into a hammer ring (from 7' to 8.2')
- Sandblasted and electrostatically powder-coated white
- Rust-resistant

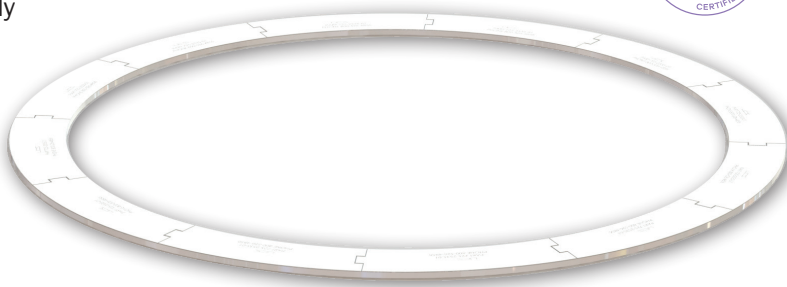

DRAWING A

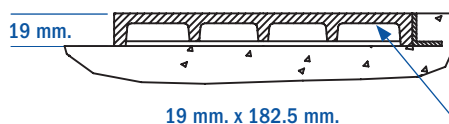

INTERLOCKING UNIT
12 PCS.

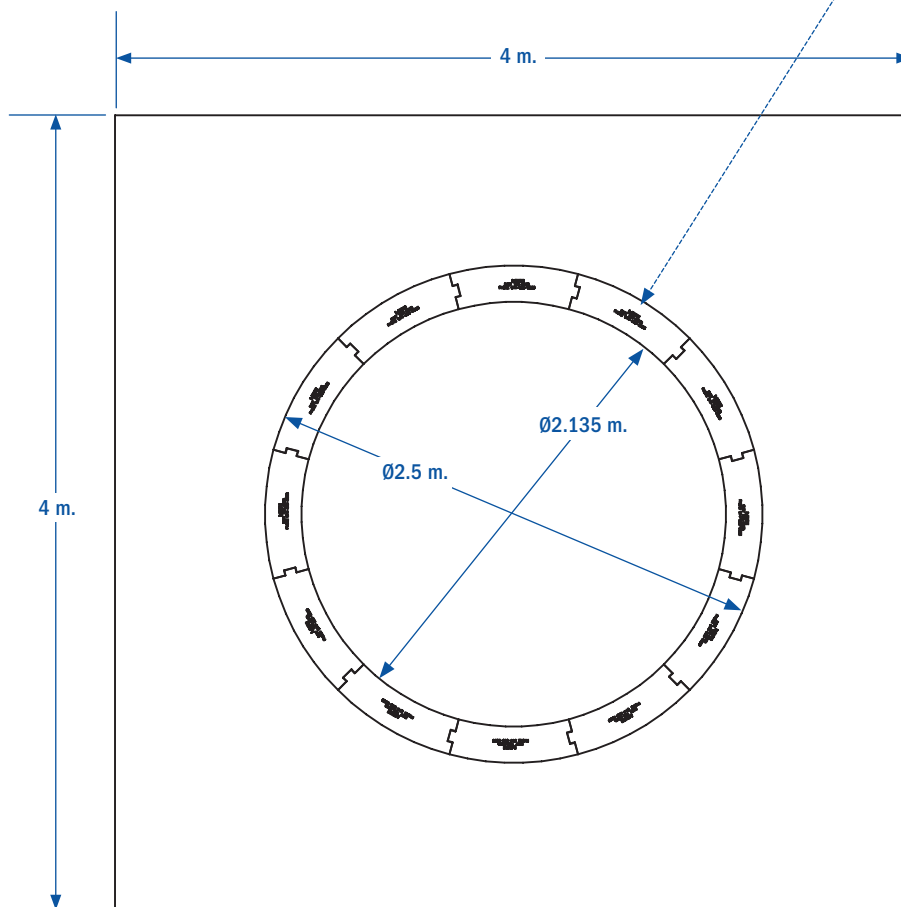



SHOT PUT RING / HAMMER RING

MODELS 725-2575 & 725-2585


RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

DESCRIPTION OF COMPONENTS:

- Two-piece, pre-bent construction
- Diameter is 7' (2.135 m.)
- 2" x 2" x 1/4" Corrosion-resistant aluminum perimeter
- Mill finish

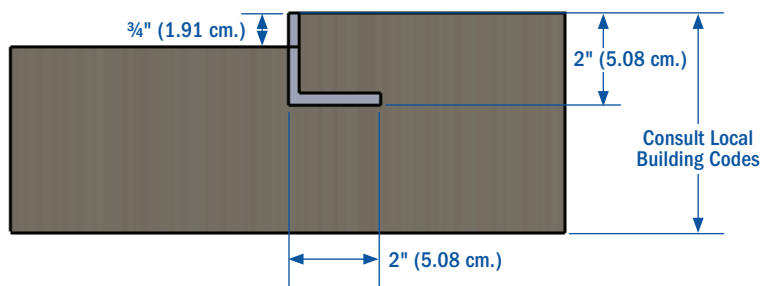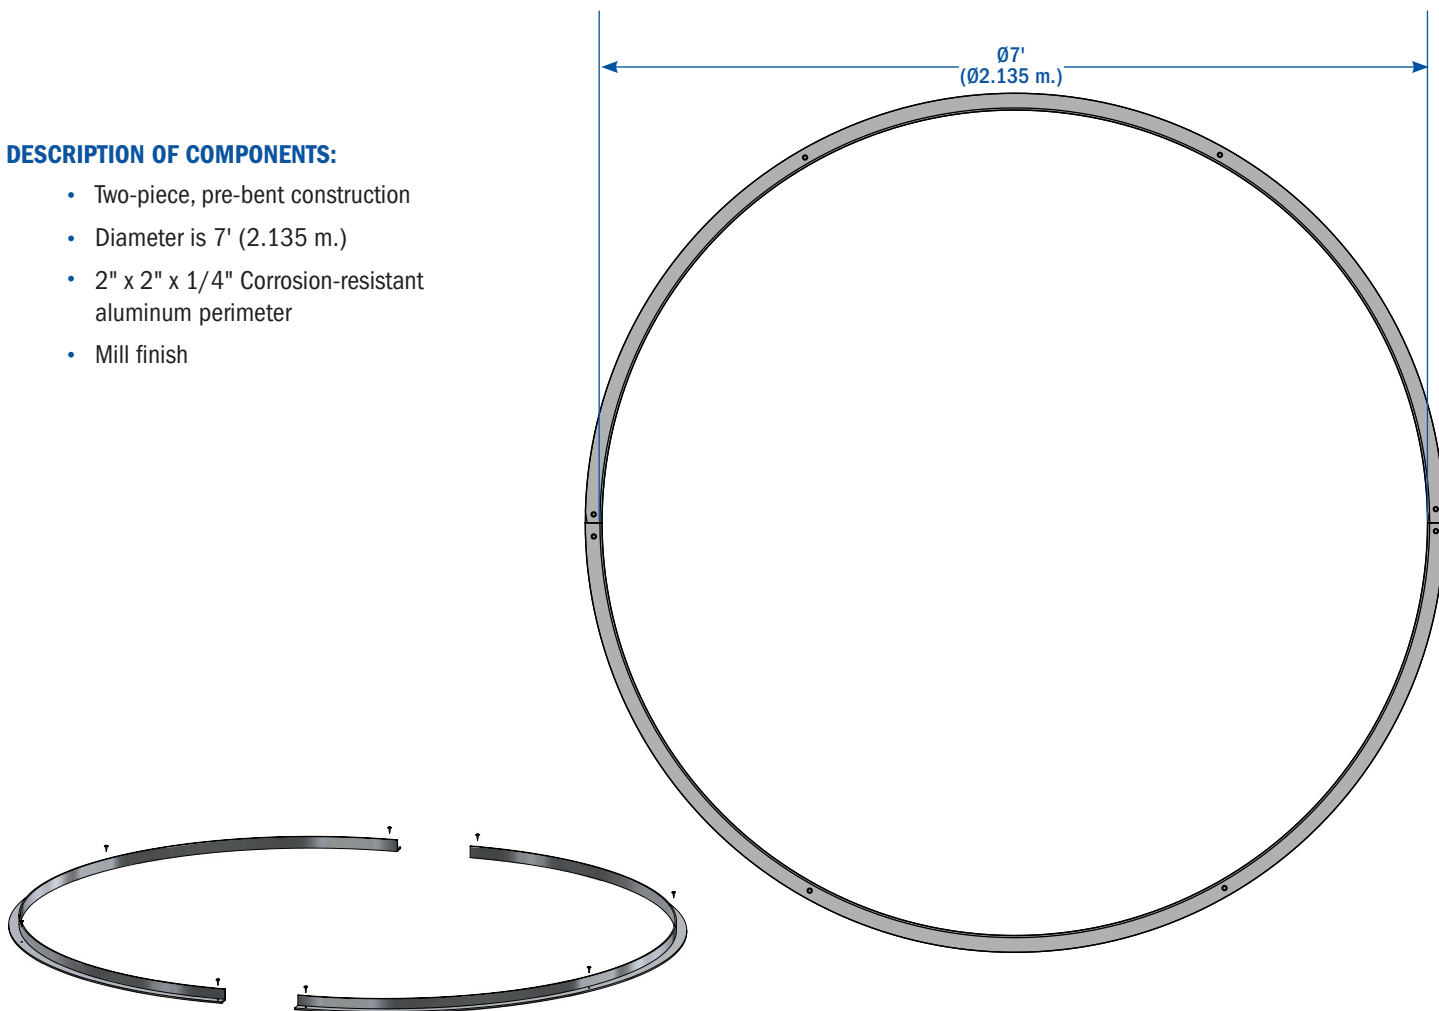

CROSS SECTION



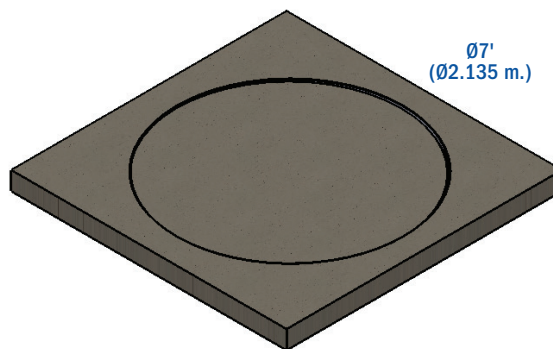


INSTALLED PRODUCT

RULE AND STANDARD COMPLIANCE NCAA & WORLD ATHLETICS


DESCRIPTION OF COMPONENTS:

- 1¾" Thick wooden platform, 8' square (8' x 8' x 1¾")
- (4) handles
- Painted outside surface of the circle
- Smooth unpainted inside surface of the circle
- Customize with graphics and your choice of color
- Includes: 3¼" World Athletics Certified Toe Board

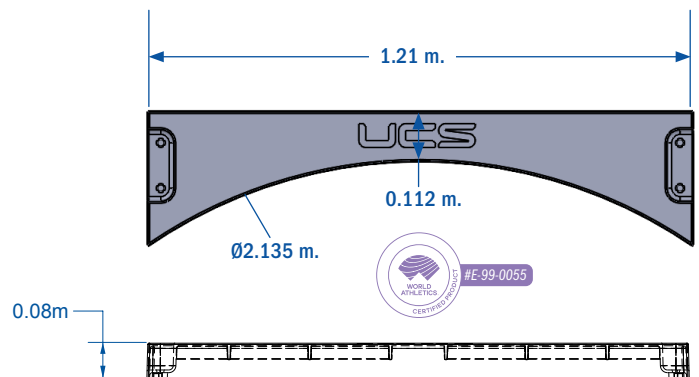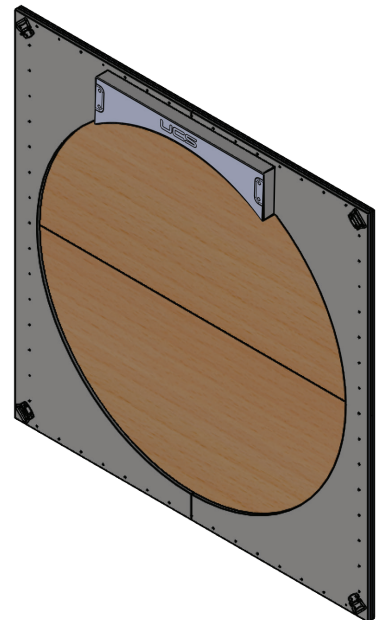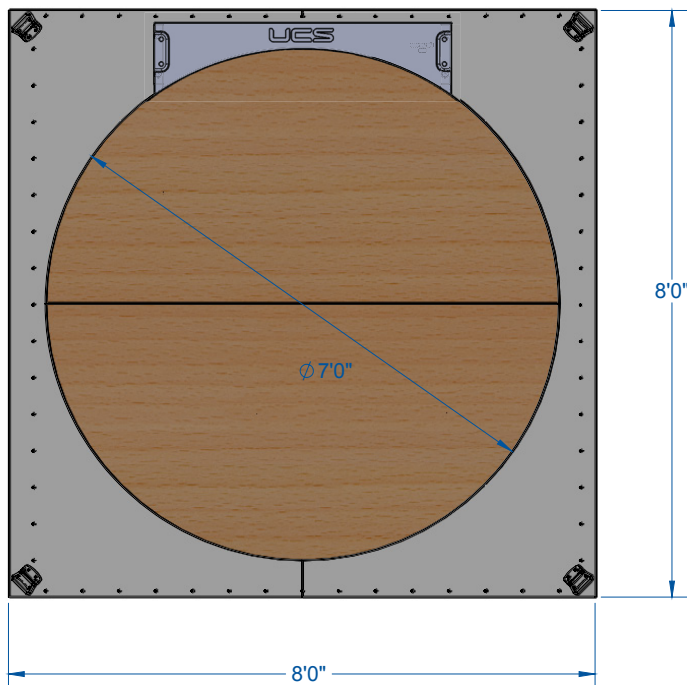



RULE AND STANDARD COMPLIANCE NCAA, NFHS, USATF, & WORLD ATHLETICS

MODEL 716-1630 3¼" Shot Put Toe Board

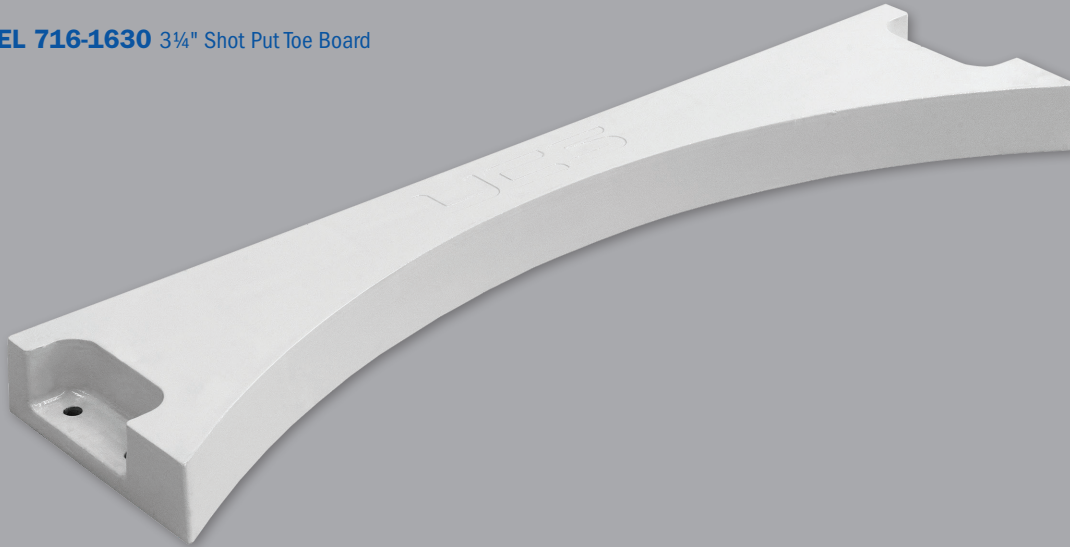



DESCRIPTION OF COMPONENTS:

- Cast aluminum for depressed rings
- (4) Mounting pre-drilled holes
- Exact radius for 7' recessed ring
- Guaranteed not to warp, split, rust, or delaminate
- Weather-resistant high-impact white powder coating

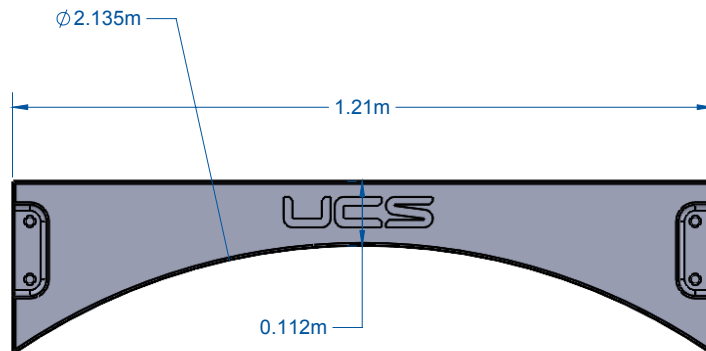

RULE AND STANDARD COMPLIANCE NFHS

MODEL 716-1640 4" Shot Put Toe Board

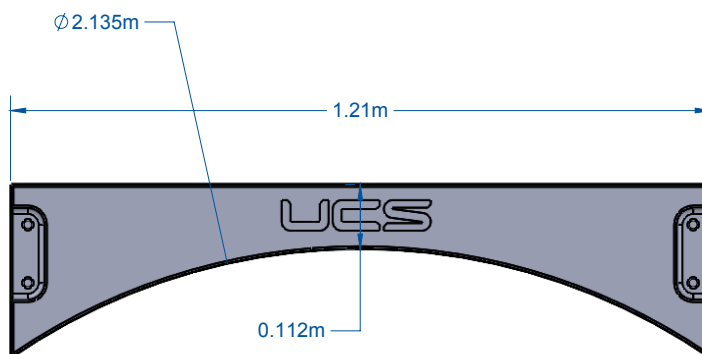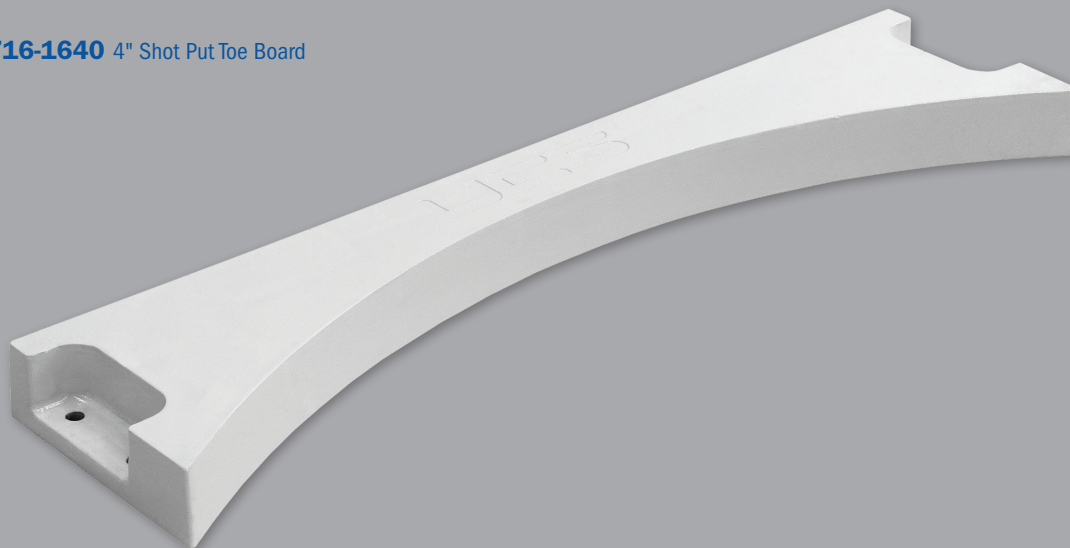

DESCRIPTION OF COMPONENTS:

- Cast aluminum
- (4) Mounting pre-drilled holes
- Guaranteed not to warp, split, rust, or delaminate
- Weather-resistant high-impact white powder coating
- Intended for surface mount or painted rings

